



TC 32 BUFFALO

tritacarne
meat grinders



TC 32 BUFFALO



TC 32 BUFFALO S

- Grandi prestazioni in una struttura compatta.
- Bocca ad alta produzione dal disegno esclusivo.
- La grande disponibilità di accessori la rende adatta sia per l'uso nel banco che nel laboratorio.
- Bocca inox esterna con rapido fissaggio a baionetta.
- Collo introduzione quadro per grande produttività anche in seconda passata.
- Sistema di protezione ingranaggi con doppio paraolio.
- Motore ventilato per uso continuo.
- Comandi inox IP 67 con inversione.

Opzioni:

- Sistema di protezione contro i sovraccarichi di corrente.
- Tramoggia gigante e super (no TC 32 Buffalo S).
- Gambe alte medie e basse (no TC 32 Buffalo S).
- Piano portavassoio estraibile.
- Bocca unger e semiunger.
- Insacchiatrice continua.
- Paraspruzzi.
- Sistema di protezione interbloccato per uso piastre con foro > 8 mm.
- Predisposizione per Format S con pedaliera (no TC 32 Buffalo S).

- Compact heavy duty mincer.
- Exclusive design high output grinding head.
- Available both table top or floor standing (many optionals available).
- Stainless steel head with quick bayonette fitting.
- Square feeding neck (high output also with pre-minced meat).
- Gear box with double sealing system.
- Ventilated motor for continuous operation.
- IP 67 protection rated controls with reverse.

Optionals:

- Overload protection.
- Larger trays: "gigante" or "super" (not available for TC 32 Buffalo S).
- Short, medium, long legs (not available for TC 32 Buffalo S).
- Receiving tray holder.
- Half/total unger system.
- Stuffer kit.
- Splash guard.
- Interlock protection for more than 8 mm holes plates (An interlock protection system is required in order to utilize more than 8 mm holes plates).
- Arrangement for Format S with pedal controls (not available for TC 32 Buffalo S).



TC 32 BUFFALO S

Opzionali:


Options:



Supporto vassoio
Tray support



Tramoggia gigante
Larger feed tray



Tramoggia super
Lager tray super



Gambe con ruote
Legs with wheels



Protezione bocca per piastra con foro
 $\varnothing > 8$ mm.
Safety device for $\varnothing > 8$ mm plates.



Paraspruzzi
Splash guard



Pedaliera opzionale
Optional pedal controls







Standard o 1/2 Unger
enterprise Unger Totale



Leva avvitata/sgancia TC 32 standard
Standard TC 32 ring fixing/removing tool




Estrattore piastre standard
Plates removal tool standard




Gambe basse con piedino
Short legs with feet

X: 131 mm
Y: 271 mm
Z: 741 mm



Gambe medie con ruote
Medium legs with wheels

X: 416 mm
Y: 556 mm
Z: 1026 mm

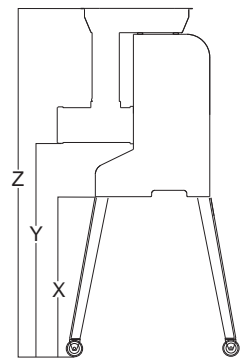

Gambe alte con ruote
High legs with wheels

X: 688 mm
Y: 828 mm
Z: 1298 mm

					A	B	C	D	E	F	G	U	V			
	watt/HP	kg/h.	\varnothing mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	mm	kg
TC 32 Buffalo Hp 3	2.205/3	1ph/3ph	700	4.5	385	315	540	540	150	620	720	94	82	65	640x760x850	80
TC 32 Buffalo Hp 4	2.940/4	3ph	700	4.5	385	315	540	540	150	620	720	94	82	65	640x760x850	80
TC 32 Buffalo Hp 4 S	2.940/4	3ph	700	4.5	446	320	625	538	123	592	691	94	82	70	640x760x850	85
Tramoggia standard	-	-	-	-	-	-	-	535x450x90	-	-	-	-	-	-	-	-
Tramoggia gigante	-	-	-	-	-	-	-	535x660x90	-	-	-	-	-	-	-	-
Tramoggia super	-	-	-	-	-	-	-	563x900x120	-	-	-	-	-	-	-	-